

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.C11293 DI

First Named Inventor or Application Identifier

MAKOTO OGURA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages **46**

3. ☒ Drawing(s) (35 USC 113) Total Sheets **14**

4. ☒ Oath or Declaration Total Pages **2**

a. ☐ Newly executed (original or copy)

b. ☐ Unexecuted for information purposes

c. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**

Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

5. ☒ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☒ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation

☒ Divisional

☐ Continuation-in-part (CIP) of prior application No. **08/617,634**

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

055114

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	15-20 =		X \$ 18.00 =	\$ -0-
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	1-3 =		X \$ 78.00 =	\$ -0-
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
			Total of above Calculations = \$ 1020.00		
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$ 1020.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1020.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME Joseph W. Ragusa (38,586)

SIGNATURE

Joseph W. Ragusa

DATE

June 28, 1999

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
: Examiner: J. Hartary
MAKOTO OGURA)
: Group Art Unit: 2853
Application No.: Div. of)
: 08/617,634)
: Filed: Herewith)
: For: LIGHT CONDUCTIVE MEMBER,)
ILLUMINATING DEVICE)
: HAVING THE SAME, AND)
INFORMATION PROCESSING)
: APPARATUS HAVING THE)
ILLUMINATING DEVICE)
: June 28, 1999

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to examination on the merits, please amend the above-identified application as follows:

IN THE SPECIFICATION:

After the title, please insert:

--CROSS-REFERENCE TO RELATED APPLICATION

This application is a division of U.S. Application
No. 08/617,634, filed March 19, 1996.--

IN THE CLAIMS:

Please cancel Claims 1-44 without prejudice.

Please add Claims 45-51 as follows:

--45. A light conductive member comprising a light entrance face in a part of a lateral face other than an end in the longitudinal direction of a rod-shaped translucent member; an inclined area on a side opposed to said light entrance face, for reflecting and/or diffusing an entering light beam into the longitudinal direction of said rod-shaped translucent member; and an exit face in at least a part of a lateral face, for emitting at least a part of said reflected and/or diffused light beam.

46. A light conductive member according to claim 45, further comprising a second area, on a side opposed to said exit face, for further reflecting and/or diffusing the light beam reflected and/or diffused by the first-mentioned area.

47. A light conductive member according to claim 45, wherein the cross sectional area of said rod-shaped translucent member becomes progressively smaller, in comparison with that at said light entrance face, toward the ends along the longitudinal direction.

48. An illuminating device comprising a light conductive member according to any one of claims 45, 46 or 47 and a light source for irradiating the light entrance face of said light conductive member with light.

49. An illuminating device according to claim 48, wherein said light source is an LED.

50. An illuminating device according to claim 48, wherein said light source is composed of plural light-emitting members with mutually different light emission wavelength ranges.

51. An information processing apparatus adapted to illuminate an original with the illuminating device according to claim 48 and to effect photoelectric conversion on the obtained reflected light.

REMARKS

This is a division of Application No. 08/617,634, filed March 19, 1996. Claims 1-44 have been cancelled without prejudice. Claims 45-51 are presented for examination.


An Information Disclosure Statement is being filed herewith to cite the art of record in the parent.

An early and favorable Office Action on the merits is respectfully requested.

Applicant's undersigned attorney may be reached in our New York office by telephone at (212) 218-2100. All

correspondence should continue to be directed to our address given below.

Respectfully submitted,


Attorney for Applicant

Registration No. 38,586

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 218-2200

NY_MAIN 11602 v1

Light Conductive Member, Illuminating Device Having
the Same, and Information Processing Apparatus Having
the Illuminating Device

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a light
conductive member, an illuminating device having the
light conductive member, and an information processing
10 apparatus having the illuminating device.

Related Background Art

For an illuminating device for the reading device
of the information processing apparatus such as a
facsimile apparatus, an electronic copying machine or
15 the like, there has been employed a discharge tube such
as a fluorescent tube or an LED array consisting of a
linear array of a multitude of LED chips. Particularly
in recent years, the use of the LED array has become
popular as the demand for compacter and less expensive
20 products is increasing with the increase of in-home use
for example of the facsimile apparatus.

An example of the illuminating device utilizing
such LED array will be explained with reference to
Figs. 1A and 1B. In Fig. 1A there are shown an LED
25 array 41, illuminated surface 42 such as a surface of
an original, and LED chips 43. Fig. 1A illustrates the
schematic configuration of the illuminating device

employing the LED array, together with the illuminated surface (original), while Fig. 1B shows an example of illumination intensity distribution on the original surface when the original is illuminated with the
5 illuminating device shown in Fig. 1A.

The illumination intensity distribution on the original surface depends on the number of the LED chips 43 employed, and, if the density of the LED chips 43 is reduced for the purpose of cost reduction, because of
10 the increased interval of the LED chips 43, the illumination intensity distribution on the illuminated surface becomes uneven as shown in Fig. 6B. Consequently it becomes not only impossible to achieve uniform illumination but also there are generated
15 portions which are not illuminated with the sufficient amount of light. As the exact original reading becomes difficult under extremely uneven illumination, there has been a limit in the cost reduction by the decrease of the number of the LED chips.

20 On the other hand, for a linear illuminating device for expanding the light from a light source in linear shape, there can be conceived a configuration as shown in Figs. 2A and 2B. In a schematic lateral view and a schematic cross-sectional view respectively in
25 Figs. 2A and 2B, there are shown a light source 1 such as a halogen lamp, a tungsten lamp or an LED chip, a translucent member 2 with a circular cross section such

as a quartz rod, an entrance face 3 of the translucent member 2 for the entry of the light beam from the light source 1, and an area 4 for reflecting or scattering the light, propagating in the translucent member 2, for taking the light out of the translucent member 2. This area 4 is formed, for example, by forming a coarse surface or applying light scattering/reflecting paint on a part of the surface of the translucent member 2.

A reflecting face 5 is provided at an end, opposite to the light source 1, of the translucent member 2, and may be formed by evaporating a metal such as aluminum on an end face of the translucent member 2 itself, or by applying light scattering/reflecting paint, or may be provided as a separate member. The cross-sectional shape of the translucent member 2 is not limited to circular but may also be square or rectangular. Fig. 2C shows the obtained illumination intensity distribution.

As shown in Fig. 2A, the light beam L emitted from the light source 1 and entering the translucent member 2 from the entrance face 3 thereof propagates therein by repeating reflections on the inner face of the translucent member 2, then reflected by the end face opposite to the entrance face 3 upon reaching the above-mentioned opposite face and propagates again in the translucent member 2. When the light enters the area 4 in the course of repeated reflections, the light

beam is scattered and a part L1 the light is emitted to the outside through a side opposite to the area 4. The remaining part L2 of the scattered light obliquely enters the exit face thereby being totally reflected
5 thereby and propagates again in the translucent member. Thus, after the repetition of propagation, the light eventually reaching the entrance face 3 is emitted to the outside through the entrance face 3.

In case a light bulb such as a tungsten lamp is
10 employed as the light source 1, the amount of emitted light can be increased by increasing the electric power even despite of the loss of light emitted from the entrance face 3, there can be obtained a reasonably high illumination intensity.

15 However, such electric light bulb is associated with drawbacks that a high electric power consumption is required for obtaining a high illumination intensity, and that the device cannot be made compact because of the large amount of heat generation. In
20 addition, the service life of the electric bulb is considerably short, even in comparison with that of the fluorescent lamp, necessitating replacements as a result of decrease in the light intensity and filament breakage, so that a maintenance-free device as in the
25 case of LED cannot be obtained.

For these reasons, the illuminating device as the reading light source of the information processing

apparatus such as the facsimile apparatus preferably employs an LED light source and has such a configuration as to emit the light therefrom in linear form.

5 On the other hand, in case an LED is employed as the light source 1, the illumination intensity becomes inevitably low as the light emission amount is less than that of the electric bulb.

For example, in the configuration shown in Fig. 10 2A, the illumination intensity is high at the side of the light source 1 but is low at the side of the end face opposite to the entrance face 3, thereby providing an extremely uneven illumination.

For resolving this drawback, there is proposed, as 15 shown in a schematic lateral view in Fig. 3A, a method of positioning light sources 1 on both ends of the translucent member 1. As the illumination intensity distribution is compensated by the light beams entering from both ends, the distribution assumes a form as 20 shown in Fig. 3C, which is more uniform than that in Fig. 3B. In this case the cross-sectional configuration is as shown in Fig. 3B and same as that shown in Fig. 2B.

However, even the configuration shown in Figs. 3A 25 and 3B may still result in the following drawbacks:

(1) As the light sources are positioned longitudinally with the translucent member, the

illuminating device becomes longer in comparison with the effective illuminating length of the translucent member;

5 (2) In case the amounts of light emission of the light sources on both ends are mutually different, the illumination intensity distribution becomes slanted, and the adjustment of the amounts of light emission of both light sources requires an additional cost;

10 (3) As the device is easily influenced by the longitudinal elongation or contraction of the translucent member, such influence has to be absorbed by the holding structure of the light sources, and, for this reason, it is difficult to achieve satisfactory heat dissipation;

15 (4) As the electric power supply has to be made to the light sources on both ends, an increased cost is required for the wirings; and

(5) In order to increase the illumination intensity for the entire device, it is necessary, for
20 example, to increase the number of LED chips in the light sources. Such increase requires a corresponding increase of the light entrance face of the translucent member, thus resulting in a larger dimension of the illuminating device and the information processing
25 apparatus.

Also in the color image reading by switching the emission wavelength of the light source and reading the

reflected light from the original at each wavelength, the above-mentioned drawbacks (1) to (5) become more serious as the number of signal lines increases for switching the emission wavelength.

5

SUMMARY OF THE INVENTION

An object of the present invention is to resolve drawbacks that the conventional illumination means employing a linear array of LED chips and the
10 information processing apparatus utilizing such illumination means are unable to achieve a sufficiently low cost because of the large number of LED chips required and have a limit in the reduction of power consumption even with the use of LED's, and that an
15 extremely uneven illumination state is obtained with a high illumination intensity on the original surface corresponding to the positions of the LED chips and a low intensity in the positions between the LED chips when the number of LED's is decreased in the LED array,
20 or the illumination intensity on the original surface becomes uneven when the LED chips are positioned on the end faces of the translucent member, or an additional circuit is required for compensating the unevenness in the illumination intensity distribution, leading to a
25 higher cost.

Another object of the present invention is to resolve drawbacks of a high electric power consumption

associated with the illuminating means utilizing the electric bulb and the information processing apparatus utilizing such illuminating means, or of a high amount of heat generation which hinders compactization of the device, or of difficulty in realizing a maintenance-free configuration.

Still another object of the present invention is to provide an illuminating device of a high uniformity of the illumination intensity and a lower electric power consumption, allowing easy compactization, a light conductive member for use in such illuminating device and an information processing apparatus utilizing such illuminating device.

Still another object of the present invention is to provide an illuminating device of a high uniformity of the illumination intensity and a low electric power consumption, allowing easy compactization and cost reduction, adapted for use in the color image reading by switching the emission wavelength of the light source, a light conductive member for use in such illuminating device and an information processing apparatus utilizing such illuminating device.

Still another object of the present invention is to provide a light conductive member consisting of a rod-shaped translucent member having a light entrance face in a part of the lateral face thereof, an area positioned opposite to the light entrance face, for

reflecting and/or diffusing the entering light beam in the longitudinal direction of the rod-shaped translucent member and an exit face for emitting at least a part of thus reflected and/or diffused light beam, formed in at least a part of the lateral face excluding the above-mentioned area and the light entrance face, an illuminating device utilizing the above-mentioned light conductive member and an information processing apparatus utilizing such illuminating device.

Still another object of the present invention is to provide a light conductive member provided with a light entrance portion formed in at least a part of a longitudinal lateral face, called a first side, of a translucent member; an area formed on a second side opposed to the light entrance portion, for reflecting or diffusing the light entering the translucent member principally to outside the light entrance portion within the above-mentioned translucent member; a light reflecting or diffusing area formed on a third side different from the first or second side; and a fourth side opposed to the third side, for emitting the light to the outside of the translucent member.

Still another object of the present invention is to provide an illuminating device comprising a light conductive member provided with a light conductive member having a light entrance portion formed in at

least a part of a longitudinal lateral face, called a first side, of a translucent member; an area formed on a second side opposed to the light entrance portion, for reflecting or diffusing the light entering the translucent member principally to outside the light entrance portion within the above-mentioned translucent member; a light reflecting or diffusing area formed on a third side different from the first or second side; and a fourth side opposed to the third side, for emitting the light to the outside of the translucent member, and a light source provided corresponding to the light entrance portion.

Still another object of the present invention is to provide an information processing apparatus comprising:

a photoelectric conversion device having a plurality of photoelectric conversion elements and positioned opposite to an image to be read;

an illumination device for illuminating the image;

wherein said illuminating device includes a light conductive member provided with a light conductive member having a light entrance portion formed in at least a part of a longitudinal lateral face, called a first side of a translucent member; an area formed on a second side opposed to the light entrance portion, for reflecting or diffusing the light entering the translucent member principally to outside the light

entrance portion within the above-mentioned translucent member; a light reflecting or diffusing area formed on a third side different from the first or second side; and a fourth side opposed to the third side, for
5 emitting the light to the outside of the translucent member, and a light source provided corresponding to the light entrance portion;

an output unit for recording an image on a document by electric signals corresponding to the image
10 information; and

a controller for controlling the photoelectric conversion device, the light source and the output unit.

15 BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A, 2A and 3A are schematic lateral views showing examples of configuration of conventional illuminating devices;

Figs. 2B and 3B are schematic cross-sectional
20 views thereof;

Figs. 1B, 2C and 3C are charts showing examples of the illumination intensity distribution when a surface is illuminated by the devices respectively shown in Figs. 1A, 2A and 3A;

25 Figs. 4A and 5A are schematic plan views showing preferred embodiments of the illuminating device of the present invention;

Figs. 4B, 4C, 5B and 5C are lateral views thereof;

Figs. 4D and 5D are charts showing examples of the illumination intensity distribution thereof;

Figs. 6A and 6B are respectively a schematic
5 cross-sectional view and a schematic perspective view
of a preferred embodiment of the illuminating device of
the present invention;

Fig. 7 is a schematic plan view of an example of
the light source;

10 Fig. 8 is a schematic cross-sectional view of a
part of an information processing apparatus;

Fig. 9 is a schematic lateral view of an
illuminating device of the present invention;

Fig. 10 is a schematic perspective view of a
15 photoelectric conversion device having the illuminating
device of the present invention;

Fig. 11 is a schematic cross-sectional view of an
example of the information processing apparatus;

Figs. 12, 13 and 14 are schematic magnified
20 partial cross-sectional views of the vicinity of an
image reading unit of the information processing
apparatus;

Fig. 15 is a partially cut-off schematic
perspective view of an example of the ink jet recording
25 head;

Figs. 16 and 18 are schematic perspective view
showing examples of an output unit of the information

processing apparatus; and

Fig. 17 is a schematic block diagram of an example of the information processing apparatus.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Through intensive investigations, the present inventors have found that the aforementioned objects can be attained by a suitable shape of the light conductive member and a position of the light source.

10 More specifically, the present invention has been based on a finding that the aforementioned objects can be attained by a light conductive member of which cross section, along a plane perpendicular to the longitudinal direction thereof, is not constant, and
15 which has a light entrance area and an area for reflecting or diffusing the light entering from the light entrance area into the light conductive member, in a portion other than the end portions of the light conductive member.

20 In the following the present invention will be explained in detail by preferred embodiment thereof shown in the attached drawings.

[First embodiment]

25 Figs. 4A to 4C illustrate an illuminating device constituting a preferred embodiment of the present invention and are respectively a schematic plan view seen from an exit face side for the light beam, a

schematic lateral view seen from the side of an end face in the longitudinal direction of a light conductive member and a schematic lateral view seen from the side of a light entrance face, and Fig. 4D is a chart showing an example of the illumination intensity distribution. Referring to Figs. 4A to 4C, a translucent member 2 is provided with an entrance face 3 for introducing the light beam from a light source 1, on a part of a lateral face, and an area 6 provided in the opposite side, for reflecting and/or diffusing the light beam in the longitudinal direction of the translucent member 2. In Fig. 4A, it is illustrated in a recessed wedge shape, but it may have other shapes or may be replaced by a printed, coated or evaporated reflective film or by a coarse surface, as long as the reflecting and/or diffusing function can be obtained. Also the illustrated configuration has symmetrical angles with respect to the light entrance area, but these angles may be suitably varied for example according to the position of the light entrance face 3. Also the shape of such configuration is not limited to the wedge shape but may contain curved faces.

On both ends of the translucent member 2 there are provided reflecting faces 5 for reflecting the light beam propagating in the member 2.

The reflecting faces 5 and the reflecting and/or diffusing area 6 are formed by evaporating or adhering

a metal of high reflectivity, such as aluminum, silver, gold or copper, on the end faces or a desired portion of the translucent member 2. Otherwise, paint containing white pigment such as barium oxide, barium sulfate, barium titanate, titanium oxide, lead white
5 (2PbCO₃Pb(OH)₂), zinc oxide or calcium carbonate or pigment of other colors or particulate substance such as metal powder may be applied as light reflect/diffusing paint on the end faces or the desired
10 portion. Otherwise, a member or members coated with such paint may be applied onto the end faces or the desired portion. The above-mentioned metal of high reflectivity is preferably composed of aluminum, in consideration of the cost and ease of adaptation to
15 color image reading.

The reflective faces 5 are not necessarily indispensable and the light reflect/diffusing property can be obtained by forming coarse surface on both end faces of the translucent member 2, in case a sufficient
20 amount of light is introduced into the translucent member 2 or depending upon the amount of light emitted from the translucent member 2 to the illuminated surface.

Also, as shown in Figs. 4B and 4C, opposite to the
25 light emitting face at the side of an illuminated surface 42, there is formed an area 4 for reflecting and/or diffusing the light propagating in the

translucent member 2, thereby emitting the light from the translucent member 2 to the outside.

This area 4 allows the light, entering this area 4 to effectively propagate in the translucent member 2
5 and to reach the exit face efficiently.

This area 4 may be formed by forming a coarse surface or applying light reflect/diffusing paint as explained above, on a part of the translucent member 2.

The light beam from the light source 1 enters the
10 translucent member 2 through the entrance face 3, and propagates toward the end faces in the longitudinal direction, by reflection and scattering in the area 6. The light beam propagates in the translucent member 2 by repeating reflection therein, then reflected by the
15 reflective faces 5 on both ends and again propagates in the translucent member 2.

In the course of such repeated reflections, upon falling on the area 4, the light beam is diffused therein and a part of the light is taken out to the
20 outside through the exit face opposite to the above-mentioned area 4. Fig. 4D shows an example of the obtained illumination intensity distribution.

The present embodiment provides the advantages that:

25 (1) the entire length of the light source device is shortened as the effective illumination length is practically determined by the translucent member 2

only;

(2) the sloping of the illumination intensity distribution, encountered in the conventional configuration, is significantly alleviated since the
5 distribution on both sides is well balanced because of the fact that the light source is provided only in one location;

(3) the holding and heat dissipation of the light source 1 are made easy because it can be provided in a
10 side position, less influenced by the expansion or contraction of the translucent member 2;

(4) the wirings are simplified and made lighter in weight, because the light source 1 is provided only in one location;

15 (5) a higher illumination intensity can be obtained in a smaller dimension, since the increase in the illumination intensity can be achieved by an enlargement in the light source 1 and the entrance face 3;

20 (6) in an illuminating device for color image reading utilizing light sources of plural emission wavelengths, the light sources can be positioned in concentrated manner, so that the layout thereof and the driving circuits therefor can be simplified and a lower
25 cost and a smaller size can be achieved; and

(7) the number of component parts can be reduced, and the manufacturing process can be made simpler.

[Second embodiment]

Figs. 5A to 5D show the illuminating device of another preferred embodiment of the present invention and are respectively a schematic plan view seen from the side of a light exit face, a schematic lateral view, a schematic plan view seen from the side of a light entrance face, and a chart showing an example of the illumination intensity distribution.

The basic configuration is same as that of the first embodiment shown in Figs. 4A to 4C, and components equivalent to those in the first embodiment are represented by same numbers.

The present embodiment is featured by a fact, as shown in Fig. 5A, that the cross sectional area of the translucent member 2 decreases from the light entrance face 3 toward the end faces thereof.

This is because the proportion of the light beam, introduced from the entrance face 3 and propagating in the translucent member 2 by reflection or scattering in the area 6, entering the area 4 before reaching the ends of the translucent member 2 increases in inverse proportion to the cross sectional area. Thus the illumination intensity can be made higher with the increase in the distance from the light source 1, in comparison with that of the first embodiment shown in Fig. 4D.

Naturally the variation in the cross sectional

area is preferably determined in consideration of the length of the translucent member 2, the width of the area 4, the thickness and the cross section of the translucent member 2, the size and the position of the
5 light source 1.

Also the above-mentioned variation of the cross sectional area may be achieved either by a linear change or a curved change of the face of the translucent member 2.

10 The translucent member 2 in the first or second embodiment may be composed of any translucent material such as glass, quartz, acrylic resin or polycarbonate resin, but a plastic material such as acrylic resin or polycarbonate resin is preferred in consideration of
15 the cost, the weight and the ease of working.

Furthermore, the exit face opposed to the area 4 is shown as planar in the first and second embodiments, but it may also be formed as a convex lens to give directionality to the emitted light beam.

20 Such configuration is shown in a third embodiment.
[Third embodiment]

Figs. 6A and 6B illustrate another embodiment of the translucent member of the illuminating device of the present invention, and are respectively a schematic
25 cross-sectional view and a schematic perspective view. In the present embodiment, the translucent member is so formed that the cross sectional area decreases from the

center toward both ends, and the exit face is formed as a convex lens 22 for condensing the light.

By forming the exit face as a convex lens form as light beam condensing means, the emitted illuminating
5 light can be given directionality to increase the amount of the illuminating light.

The translucent member is shaped as a rectangular rod in the first embodiment, a rectangular rod with decreasing cross section toward the ends and a rod
10 having a modified cross section including a convex lens in the third embodiment, but there may also be employed other shapes such as a cylindrical rod, a pentagonal or other polygonal rod, a cylindrical rod with decreasing cross section toward the ends, a pentagonal or other
15 polygonal rod with decreasing cross section toward the ends, or combinations of the foregoing such as a rectangular rod with a convex lens.

In the foregoing embodiment, the convex lens is formed integrally with the translucent member, but a
20 member corresponding to the convex lens may be adhered to the translucent member or positioned in the vicinity thereof. However the integral configuration is preferable in reducing the number of component parts and the number of manufacturing steps.

25 [Fourth embodiment]

Fig. 7 shows an example of the configuration of the light sources of an illuminating device for color

image reading, employing plural emission wavelengths.

Fig. 7 is a schematic plan view of the light source 1 for color image reading. On a substrate 10 with wirings 11, there are provided red LED 12, green LED 13 and blue LED 14 of mutually different emission wavelengths, limiting resistors Rr, Rg, Rb and switches SWr, SWg, SWb for selecting the wavelength, respectively corresponding to these LED's.

The color image reading can be achieved by turning on the red LED 12, green LED 13 and blue LED 14 in succession by correspondingly operating the switches SWr, SWg, SWb and processing the respective outputs of the sensor. In this case, the number and the layout of the LED's of respective colors are not particularly restricted. Naturally the LED's may emit the light of a single color or plural colors. Also they may emit the light of a same color. Also instead of the illustrated grouped wirings, the LED's may be individually turned on if necessary.

The above-explained light source can be used as the light source 1 in the foregoing embodiments.

[Fifth embodiment]

Fig. 8 is a schematic cross-sectional view of a part of an information processing apparatus of the present invention, wherein components equivalent to those in Figs. 1A to 2C are represented by same numbers. The present embodiment is an application of

the illuminating device of the present invention to an information processing apparatus which is an optical image reading apparatus.

5 A translucent sensor substrate 7 is provided with a one-dimensional array of a plurality of photoelectric conversion elements, formed by a thin semiconductor film such as of amorphous silicon or polycrystalline silicon.

10 The translucent sensor substrate 7 is provided thereon with an unrepresented protective layer, for protecting the unrepresented photoelectric conversion elements from contact with the original.

15 A light beam emitted from the light source 1 propagates in the translucent member 2 by reflections therein, and a part of the light beam is reflected or scattered by the area 4 and emerges from the translucent member 2.

20 The emitted light is transmitted by an unrepresented illuminating window of the translucent sensor substrate 7 and illuminates an original 100. Within the reflected portion of the illuminating light, a portion returning to the translucent sensor substrate 7 is converted into electrical signals by the unrepresented photoelectric conversion elements.

25 The optical image reading device of the present embodiment allows to provide an information processing apparatus with a compact illuminating device of a low

cost and a uniform light intensity distribution of a level not achievable in the prior art.

In the present invention, the area 4 may be composed of a reflecting or diffusing face of a sawtooth shape, as illustrated in Fig. 9.

Also the light source 1 need not necessarily be positioned at the center of the translucent member 2 but may be deviated toward an end thereof, as long as the required illumination intensity distribution can be obtained.

[Sixth embodiment]

Fig. 10 is a schematic perspective view of a photoelectric image reading device utilizing the illuminating device of the present invention, wherein shown area a sensor substrate 1014, a protective glass 1015 and a casing 1016 of the photoelectric conversion device. The sensor substrate 1014 is provided thereon with a linear array or plural arrays of a plurality of photoelectric conversion elements, formed with a thin semiconductor layer such as of amorphous silicon or polycrystalline silicon. The protective glass 1015 is provided on the unrepresented photoelectric conversion elements, for protecting the same from breakage by contact with the original. The casing 1016 is provided therein with a space for fitting the illuminating device and a cylindrical lens 1009, which can be inserted from an end side and set in a predetermined

position. The LED light source 1 is provided on a protruding portion (not shown) of the translucent member 2, which is maintained in position by a screw 162 fitted in a threaded hole 161.

5 The translucent member 2 is provided with a mounting portion 1037 for engaging with the casing 1016, but such mounting portion 1037 is not indispensable and is not limited to the illustrated shape. Such mounting portion 1037 may also be provided
10 in the translucent member 2 in the foregoing first to third embodiments.

[Seventh embodiment]

 In the following there will be explained an application of the illuminating device of the present
15 invention to an information processing apparatus.

 Fig. 11 shows an example of the information processing apparatus, such as a facsimile apparatus, constructed with the photoelectric conversion device of the present invention.

20 There are shown a feed roller 102 for feeding an original 1117 toward a reading position, a separating piece 104 for securing separating the originals P, and a transport roller 1118 provided at the reading position of a photoelectric conversion device 100 for
25 defining the read surface of the original 1117 and for transporting the original 1117.

 A recording medium W in the form of a rolled sheet

records the image information read by the photoelectric conversion device 100 or transmitted from the outside in case of facsimile transmission. A recording head 110 for image formation can be of various types, such as a thermal head or an ink jet recording head. Also it can be of a serial type or a line type. A platen roller 112 transports the recording medium W to a recording position by the recording head 110 and defines the recording face of the recording medium W.

An operation panel 120 is provided with switches for entering instructions for operations and a display unit for displaying various messages and the status of the device.

A system control board 130 is provided with a control unit for controlling various units, a drive circuit for the photoelectric conversion elements, an image information processing unit, a transmission/reception unit etc. There is also provided a power supply unit 140.

Figs. 12 and 13 are schematic magnified views of the photoelectric conversion device of the information processing apparatus shown in Fig. 11. Fig. 12 shows a configuration with a complete contact sensor, while Fig. 13 shows a configuration with an imaging optical system 1119 capable of light condensation. A light beam emitted from illuminating means illuminates the original 1117, and the light reflected according to the

image information is focused on the photoelectric conversion elements 1120 through the imaging optical system 1119.

Also there may be employed a configuration shown in Fig. 14, in which an imaging optical system 1125 is provided at the side of the original, and the image is focused, through a protective glass 1123, on photoelectric conversion elements 1122 formed with a thin semiconductor film formed on a sensor substrate 1121.

In either case, the original could be illuminated with an extremely uniform distribution of the illumination intensity and the image reading could be achieved in splendid manner.

Also the illuminating devices shown in the first to third embodiments enabled much superior image reading, in comparison with the conventional illuminating devices.

The illuminating device of the present invention, being capable of providing a sufficient amount of light, is also suitable for color image reading. Also for adjusting the color temperature of the illuminating light, there may be provided a filter between the LED light source and the translucent member 2, or the translucent member 2 itself may be suitably dyed. In case of such dyeing of the translucent member, it is preferred to dye the entrance face, but, if the dyeing

of a surface only is enough, it is desirable to dye the exit face of the translucent member, because the coloring or dyeing of the entire translucent member causes significant attenuation of the light beam in the course of internal reflections, thus resulting in a decrease of the light amount at the center (or in a location distant from the LED light source).

For the information output in the information processing apparatus shown in Fig. 11, there can be utilized thermal recording or thermal transfer recording with a thermal head, or ink jet recording with an ink jet recording head.

Among various ink jet recording methods, the present invention brings about a particular effect when applied to a recording head of a system utilizing thermal energy for ink discharge, because the information processing apparatus can exploit the effect of compactization of the illuminating device, as the recording head itself can be made compact.

The principle and representative configuration of such recording method are disclosed, for example, in the U.S. Patent Nos. 4,723,129 and 4,740,796. This system is applicable to so-called on-demand recording or continuous recording, but is particularly effective in the on-demand recording because the entire apparatus can be compactized.

In this system, in brief, in response to the

application of at least a drive signal representing the recording information to an electrothermal converter element positioned corresponding to a liquid channel or a sheet containing liquid (ink) therein, the element
5 generates thermal energy capable of causing a rapid temperature incase exceeding the nucleus boiling point, thereby inducing film boiling on a heat action surface of the recording head and thus forming a bubble in the liquid (ink), in one-to-one correspondence with the
10 drive signal. The liquid (ink) is discharged through a discharge opening by the growth and contraction of the bubble, thereby forming at least a liquid droplet. The drive signal is preferably formed as a pulse, as it realizes instantaneous growth and contraction of the
15 bubble, thereby attaining highly responsive discharge of the liquid (ink).

Such pulse-shaped drive signal is preferably that disclosed in the U.S. Patent Nos. 4,463,359 and 4,345,262. Also the conditions described in the U.S.
20 Patent No. 4,313,124 relative to the temperature increase rate of the heat action surface allows to obtain further improved recording.

The configuration of the recording head is given by the combinations of the liquid discharge openings,
25 liquid channels and electrothermal converter elements with linear or rectangular liquid channels, disclosed in the above-mentioned patents, but a configuration

disclosed in the U.S. Patent No. 4,558,333 in which the heat action part is positioned in a flexed area, and a configuration disclosed in the U.S. Patent No. 4,459,600 also belong to the present invention.

5 Furthermore the present invention is effective in a structure disclosed in the Japanese Patent Laid-open Application No. 59-123670, having a slit common to plural electrothermal converter elements as a discharge opening therefor, or in a structure disclosed in the
10 Japanese Patent Laid-open Application No. 59-138461, having an aperture for absorbing the pressure wave of thermal energy, in correspondence with each discharge opening.

 A full-line type recording head, capable of
15 simultaneous recording over the entire width of the recording sheet, may be obtained by plural recording heads so combined as to provide the required length as disclosed in the above-mentioned patents, or may be constructed as a single integrated recording head, and
20 the present invention can more effectively exhibit its advantages in such recording head.

 The present invention is furthermore effective in a recording head of interchangeable chip type, which can receive ink supply from the main apparatus and can
25 be electrically connected therewith upon mounting thereon, or a recording head of cartridge type in which an ink cartridge is integrally constructed with the

recording head.

Also the recording apparatus is preferably provided with the emission recovery means and other auxiliary means for the recording head, for attaining
5 further advanced maintenance-free character.

Examples of such means for the recording head include capping means, cleaning means, pressurizing or suction means, preliminary heating means composed of
10 electrothermal converter element and/or another heating device, and means for effecting an idle ink discharge independent from the recording operation, all of which are effective for achieving stable recording operation.

Furthermore, the recording mode is not limited to the recording of a single main color such as black, but
15 can be the recording of plural different colors or full color, wherein the recording head is either integrally constructed or is composed of plural units.

Furthermore, though the foregoing explanation has been made on liquid ink, it is also applicable to ink
20 which is solid below room temperature but softens or liquefies at room temperature, or which softens or liquefies within a temperature control range from 30°C to 70°C, which is ordinarily adopted in the ink jet recording. Thus the ink only needs to be liquidous
25 when the recording signal is given. Besides the ink may be changed from solid state to liquid state by intentional temperature increase by thermal energy.

In the following there will be given a brief explanation on the ink jet recording head, utilized in such recording method by liquid discharge, utilizing thermal energy.

5 Fig. 15 is a brief view illustrating an example of such ink jet recording head, composed of electrothermal converters 1503 and electrodes 1504, formed on a substrate 1502 through a semiconductor manufacturing process for example by etching, evaporation, sputtering
10 etc., with liquid channels 1505 and a ceiling plate 1506. The recording liquid 1512 is supplied from an unrepresented liquid reservoir, through a liquid supply tube 1507, to a common liquid chamber 1508 of the recording head 1501. 1509 indicates a connector for
15 the liquid supply tube.

 The liquid 1512 supplied into the common liquid chamber 1508 is supplied by so-called capillary phenomenon into the liquid channels 1510 and is stably maintained therein by forming meniscus at the discharge
20 opening at the end of the liquid channel. By energization of the electrothermal converter 1503, the liquid present thereon is rapidly heated to form a bubble in the liquid channel, and the liquid is discharged from the opening 1511 and forms a liquid
25 droplet by expansion and contraction of the bubble.

By arranging the discharge openings of the above-explained configuration with a density of 16 nozzles/mm

or higher, there can be obtained a recording head with 128 or 256 discharge openings, or a full-line recording head having the discharge openings over the entire recording width.

5 Fig. 16 is a perspective view schematically showing the related configuration of the output unit utilizing the ink jet recording method.

 In Fig. 16 there are shown an ink jet recording head 1801 for recording an image by ink discharge
10 corresponding to recording signals; and a carriage 1802 for moving the recording head 1801 in the recording (main scanning) direction. The carriage 1802 is slidably supported by guide shafts 1803, 1804 and is reciprocated in the main scanning direction by a timing
15 belt 1808, which is supported by pulleys 1806, 1807 and is driven by a carriage motor 1805 through the pulley 1807.

 A recording sheet 1809 is guided by a paper pan 1810 and is transported by an unrepresented feed
20 roller, maintained in contact with pinch rollers.

 The sheet feeding is achieved by a sheet feed motor 1816. Thus transported recording sheet 1809 is given a tension by a discharge roller 1813 and a spur 1814 and is transported in contact with a heater 1811
25 by an elastic sheet pressing plate 1812. The recording sheet 1809, bearing the ink discharged from the recording head 1801, is heated by the heater 1811

whereby the deposited ink is fixed to the sheet 1809 by water evaporation.

A recovery unit 1815 maintains the proper discharge characteristics by eliminating dusts and viscous ink adhered to the discharge openings (not shown) of the recording head 1801.

A cap 1818a, constituting a part of the recovery unit 1815 serves to cap the discharge openings of the recording head 1801, thereby preventing clogging thereof. Inside the cap 1818a, there is preferably provided an ink absorbent member 1818.

Also at the side of the recording area, the recovery unit 1815 is provided with a blade 1817 for contacting a face, bearing the discharge openings, of the recording head 1801, for removing the dusts and ink deposited on this face.

Referring to a block diagram in Fig. 17, an original supplied by original transmission means 2007 to the reading position of a reading device 2000 is read by photoelectric conversion elements 2001 therein, and electric signals bearing the image information are converted by image process means (not shown) into electric recording signals. A CPU 2002 effects recording by controlling a carriage motor 2003, a recording head 2004, a sheet feed motor 2005, a recovery unit 2006 etc.

The electrical signal bearing the image

information may also be transmitted to another image
processing apparatus for image output through
communication means 2008, or may be received from
another information processing apparatus through the
5 communication means 2008 and recorded by the recording
head 2004.

Fig. 18 schematically shows the output unit
employing a full-line recording head 1932.

In Fig. 18, a conveyor belt 1965 transports an
10 unrepresented recording medium, by the rotation of a
transport roller 1964. The recording head 1932 is
provided, on a lower face 1931 thereof, with a
plurality of discharge openings corresponding to the
recording area of the recording medium.

15 Also in this case the recording can be achieved in
a similar manner as in the serial recording head
explained in the foregoing.

The output unit explained above merely shows an
example and is naturally subject to various
20 modifications.

However the ink jet recording method utilizing
thermal energy, being capable of further compactization
and more precise recording, allows to fully exploit the
effects of the present invention and to obtain an
25 excellent information processing apparatus in its
entirety.

As explained in the foregoing, the present

invention can provide an illuminating device which can achieve uniform illumination of a high intensity with a compact dimension.

Also the present invention can provide an
5 illuminating device which is simple in configuration and can simplify the manufacturing process.

In addition the present invention can provide a photoelectric conversion device and an information processing apparatus, capable of stable image reading.

10 The illuminating device of the present invention is not limited to the foregoing embodiments but is applicable also to other optical image reading devices, utilizing lenses. It is also adapted for use as the light source for a recording apparatus utilizing a
15 liquid crystal shutter array, or as a photosensitive drum eraser for a copying machine or a laser beam printer.

The present invention is not limited to the foregoing embodiments but is subject to various
20 modifications and combinations within the scope and spirit of the appended claims.

WHAT IS CLAIMED IS:

1. A light conductive member comprising a light entrance face in a part of a lateral face of a rod-shaped translucent member; an area on a side opposed to
5 said light entrance face, for reflecting and/or diffusing an entering light beam into the longitudinal direction of said rod-shaped translucent member; and an exit face in at least a part of a lateral face other than the lateral faces on which said area and said
10 light entrance face are formed, for emitting at least a part of said reflected and/or diffused light beam.

2. A light conductive member according to claim 1, further comprising a second area, on a side opposed
15 to said exit face, for further reflecting and/or diffusing the light beam reflected and/or diffused by the first-mentioned area.

3. A light conductive member according to claim 20 1, wherein the cross sectional area of said rod-shaped translucent member is made progressively smaller, in comparison with that at said light entrance face, toward the ends along the longitudinal direction.

25 4. An illuminating device comprising a light conductive member according to claim 1, 2 or 3 and a light source for irradiating the light entrance face of

said light conductive member with light.

5. An illuminating device according to claim 4,
wherein said light source is an LED.

5

6. An illuminating device according to claim 4,
wherein said light source is composed of plural light-
emitting members with mutually different light emission
wavelength ranges.

10

7. An information processing apparatus adapted to
illuminate an original with the illuminating device
according to claim 4, 5 or 6 and to effect
photoelectric conversion on the obtained reflected
light.

15

8. A light conductive member comprising a light
entrance area provided in at least a part of a first
side which is a longitudinal lateral face of a rod-
shaped translucent member; an area provided on a second
side opposed to said light entrance area, for
principally reflecting and/or diffusing the light,
entering said translucent member, within said
translucent member but at least outside said light
entrance unit; a light reflecting or diffusing area
provided in a third side which is different from said
first and second side; and a fourth area opposed to

25

said third side, for emitting the light to the outside of said translucent member.

9. A light conductive member according to claim
5 8, wherein said reflecting or diffusing area on the second side is angled with respect to said light entrance unit.

10. A light conductive member according to claim
10 9, wherein said reflecting or diffusing area on the second side has symmetrical angles with respect to said light entrance unit.

11. A light conductive member according to claim
15 8, wherein said light entrance unit is provided on a protruding portion.

12. A light conductive member according to claim
20 8, wherein said light entrance unit is provided at a central portion in said longitudinal direction.

13. An illuminating device comprising:
a light conductive member including a light
entrance area provided in at least a part of a first
25 side which is a longitudinal lateral face of a rod-shaped translucent member; an area provided on a second side opposed to said light entrance area, for

principally reflecting and/or diffusing the light,
entering said translucent member, within said
translucent member but at least outside said light
entrance unit; a light reflecting or diffusing are
5 provided in a third side which is different from said
first and second side; and a fourth area opposed to
said third side, for emitting the light to the outside
of said translucent member; and

10 a light source provided corresponding to said
light entrance unit.

14. An illuminating device according to claim 13,
wherein said reflecting or diffusing area on the second
side is angled with respect to said light entrance
15 unit.

15. An illuminating device according to claim 14,
wherein said reflecting or diffusing area on the second
side has symmetrical angles with respect to said light
20 entrance unit.

16. An illuminating device according to claim 13,
wherein said light entrance unit is provided on a
protruding portion.

25 17. An illuminating device according to claim 13,
wherein said light entrance unit is provided at a

central portion in said longitudinal direction.

18. An illuminating device according to claim 13,
wherein said light source includes an LED.

5

19. An illuminating device according to claim 13,
wherein said light source includes a plurality of
LED's.

10 20. An illuminating device according to claim 19,
wherein said plural LED's have a same light emission
wavelength.

15 21. An illuminating device according to claim 19,
wherein said plural LED's have different light emission
wavelengths.

22. An information processing apparatus
comprising:

20 a) a photoelectric conversion device including a
plurality of photoelectric conversion elements provided
in opposed relationship to an image to be read;

b) an illuminating device for illuminating said
image; said illuminating device including:

25 a light conductive member including a light
entrance area provided in at least a part of a first
side which is a longitudinal lateral face of a rod-

shaped translucent member; an area provided on a second side opposed to said light entrance area, for principally reflecting and/or diffusing the light, entering said translucent member, within said translucent member but at least outside said light entrance unit; a light reflecting or diffusing area provided in a third side which is different from said first and second side; and a fourth area opposed to said third side, for emitting the light to the outside of said translucent member; and

a light source provided corresponding to said light entrance unit;

c) an output unit for recording an image on a sheet by electrical signals corresponding to image information; and

d) a controller for controlling said photoelectric conversion device, said light source, and said output unit.

23. An information processing apparatus according to claim 22, further comprising transporting means for transporting said original image.

24. An information processing apparatus according to claim 22, wherein said reflecting or diffusing area on the second side is angled with respect to said light entrance unit.

25. An information processing apparatus according to claim 24, wherein said reflecting or diffusing area on the second side has symmetrical angles with respect to said light entrance unit.

5

26. An information processing apparatus according to claim 22, wherein said light entrance unit is provided on a protruding portion.

10

27. An information processing apparatus according to claim 22, wherein said light entrance unit is provided at a central portion in said longitudinal direction.

15

28. An information processing apparatus according to claim 22, wherein said light source includes an LED.

20

29. An information processing apparatus according to claim 22, wherein said light source includes a plurality of LED's.

25

30. An information processing apparatus according to claim 29, wherein said plural LED's have a same light emission wavelength.

31. An information processing apparatus according to claim 29, wherein said plural LED's have different

light emission wavelengths.

32. An information processing apparatus according
to claim 22, wherein said output unit includes at least
5 either of an ink jet recording head and a thermal
recording head.

33. An information processing apparatus according
to claim 32, wherein said ink jet recording head
10 includes an electrothermal conversion element for
generating thermal energy, for forming a bubble for
discharging ink from said ink jet recording head.

34. An information processing apparatus according
15 to claim 32, further comprising recovery means for
recovering said ink jet recording head from defective
ink discharge and/or cleaning means for cleaning said
ink jet recording head.

35. An information processing apparatus according
20 to claim 22, further comprising communication means
controlled by said controller.

36. An information processing apparatus according
25 to claim 34, wherein said recovery means includes
capping means.

37. An information processing apparatus according to claim 36, wherein said capping means includes an ink absorbent member.

5 38. An information processing apparatus according to claim 34, wherein said cleaning means is a cleaning blade.

10 39. An information processing apparatus according to claim 22, further comprising a heater for heating a transported recording sheet.

15 40. An information processing apparatus according to claim 32, wherein said ink jet recording head is a full-line head.

20 41. A light conductive member according to claim 8, wherein said fourth side has a shape adapted for condensing the light.

 42. An illuminating device according to claim 13, wherein said fourth side has a shape adapted for condensing the light.

25 43. An information processing apparatus according to claim 22, wherein said fourth side has a shape adapted for condensing the light.

44. An information processing apparatus according to claim 22, further comprising light condensing means on said fourth side.

5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

ABSTRACT OF THE DISCLOSURE

For providing a compact illuminating device capable of uniform illumination with a high intensity, there is provided a light conductive member including a

5 light entrance face provided in a part of a lateral face of a rod-shaped translucent member, an area provided on a side opposed to the light entrance face, for reflecting and/or diffusing the entered light in the longitudinal direction of the translucent member,

10 and an exit face provided in at least a part of a lateral face other than those on which the area and the light entrance face are provided, for emitting at least a part of thus reflected and/or diffused light beam.

FIG. 1A
PRIOR ART

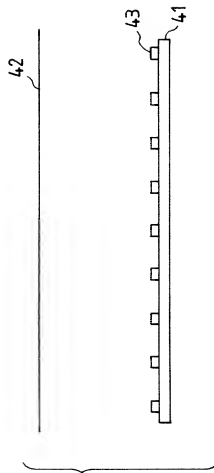


FIG. 1B
PRIOR ART

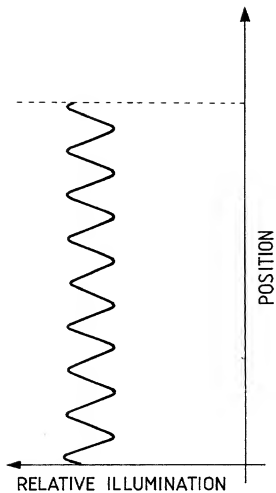


FIG. 2A
PRIOR ART

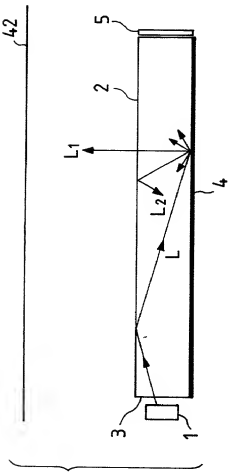


FIG. 2B
PRIOR ART


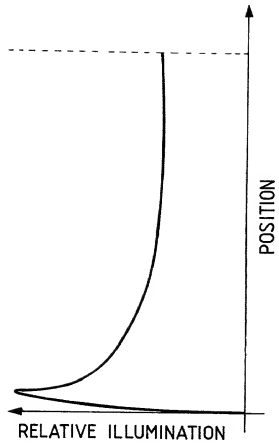


FIG. 2C
PRIOR ART



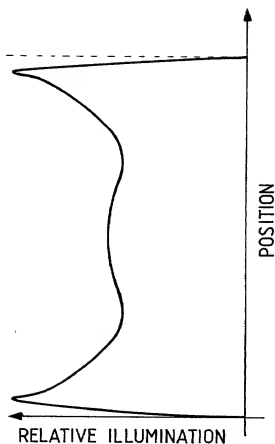
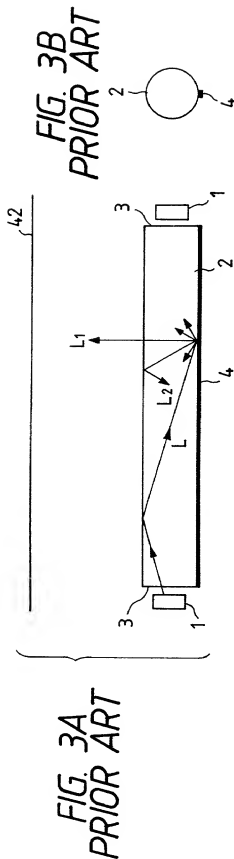


FIG. 4A




FIG. 4B




FIG. 4C

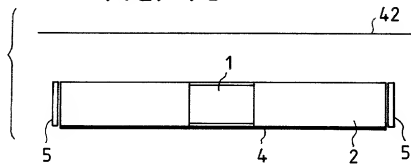


FIG. 4D

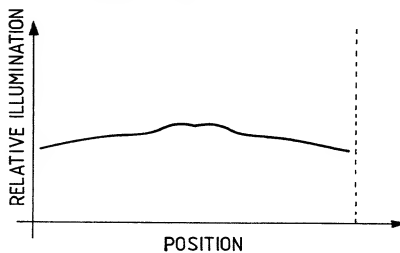


FIG. 5A

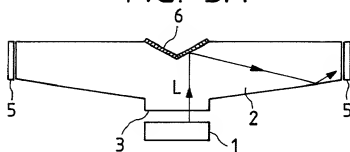


FIG. 5B




FIG. 5C

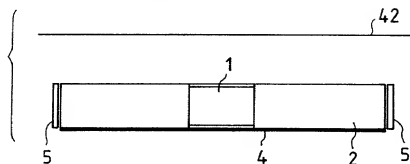


FIG. 5D

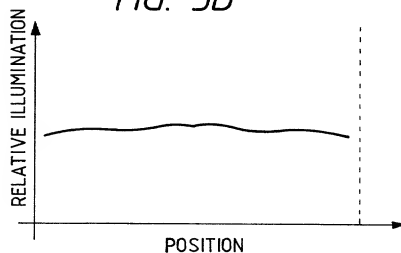


FIG. 6A




FIG. 6B

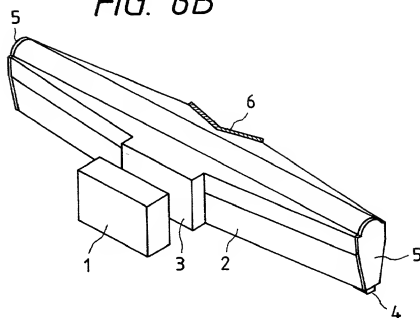


FIG. 8

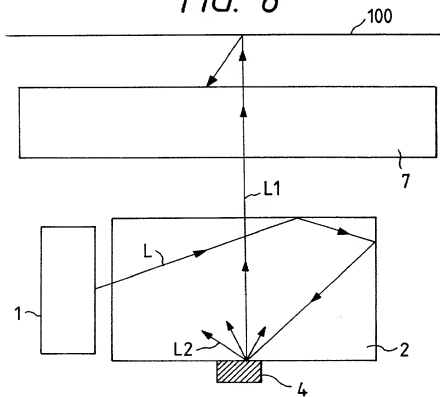


FIG. 9

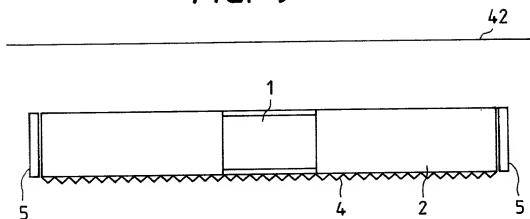


FIG. 10

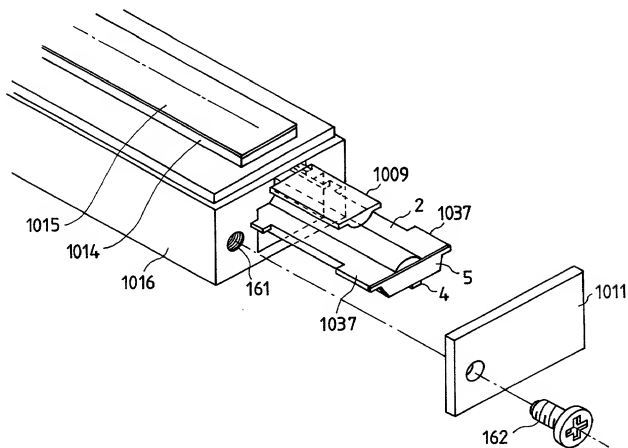


FIG. 11

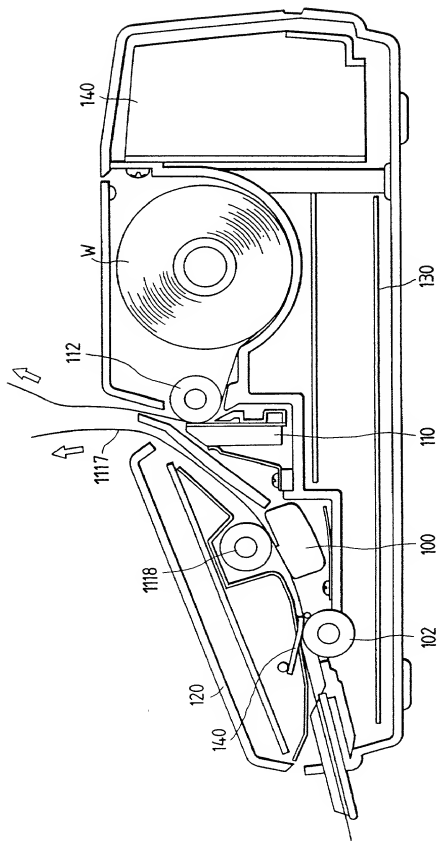


FIG. 12

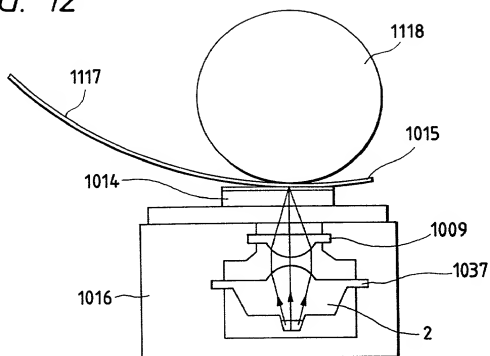


FIG. 13

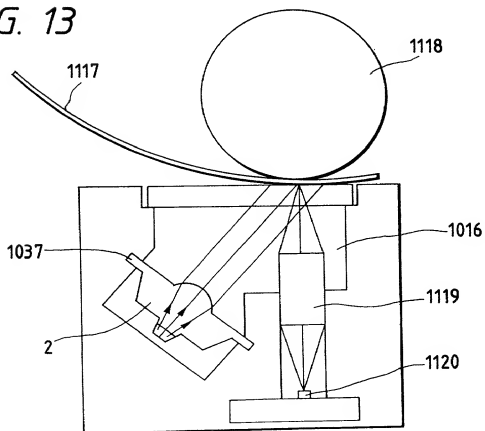


FIG. 14


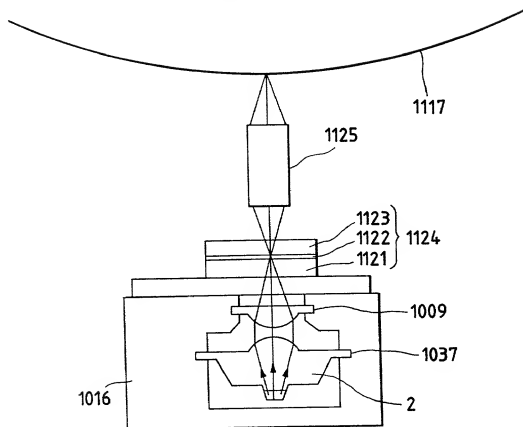


FIG. 15

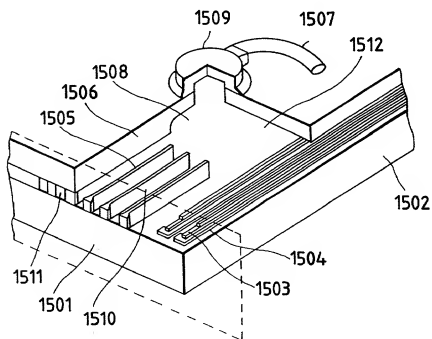

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	



FIG. 17

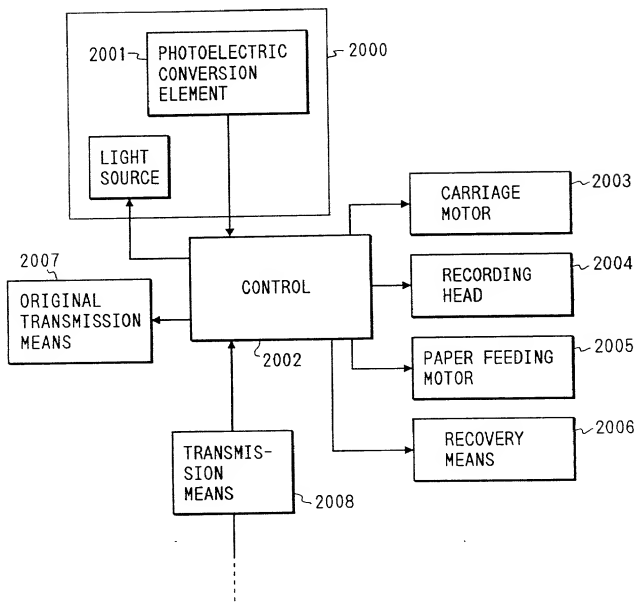
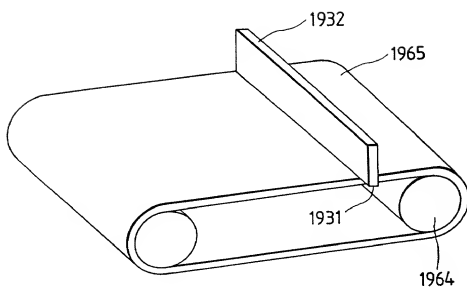


FIG. 18

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

COPY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled LIGHT CONDUCTIVE MEMBER, ILLUMINATING DEVICE HAVING THE SAME, AND INFORMATION PROCESSING APPARATUS HAVING THE ILLUMINATING DEVICE

☐ is attached hereto. ☒ was filed on March 19, 1996 the specification of which as Application No. 08/617,634

and was amended _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	Priority Claimed (Yes/No)
JAPAN	7-62601	22 March 1995	YES
JAPAN	8-55881	13 March 1996	YES

I hereby appoint Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechtold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupcic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Stevan J. Bosses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Stahl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist (Registration No. 32,078), Gary M. Jacobs (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. Haas (Registration No. 32,734), Scott K. Reed (Registration No. 32,433), Scott D. Malpede (Registration No. 32,533), Frederick M. Zullof (Registration No. 32,452), Richard P. Baur (Registration No. 31,588), Warren E. Olsen (Registration No. 27,290), Abigail F. Cousins (Registration No. 29,292), Steven E. Warner (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), Aaron C. Deditch (Registration No. 33,865), Penina Wollman (Registration No. 30,816), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), John T. Whelan (Registration No. 32,448), Jean K. Dudek (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382), Dominick A. Conde (Registration No. 33,856), Steven C. Bauman (Registration No. 33,832), Pasquale A. Razzano (Reg. No. 25,512), John W. Behringer (Registration No. 32,086), Robert C. Kline (Registration No. 17,739), Mark J. Itri (Registration No. 36,171), William C. Hwang (Registration No. 36,169), Karin L. Williams (Registration No. 36,721), Michael P. Sandomato (Registration No. 35,345), Jack M. Arnold (Registration No. 25,823), John D. Carlin (Registration No. 37,292), Daniel S. Glueck (Registration No. 37,838), Victor J. Geraci (Registration No. 38,157), Joseph W. Ragusa (Registration No. 38,586), Brian L. Klock (Registration No. 36,570), Anne M. Maher (Registration No. 38,231), William J. Zak, Jr. (Registration No. 38,668), Thomas D. Pease (Registration No. 35,317), Bruce M. Wexler (Registration No. 35,409), and Robert S. Mayer (Registration No. 38,544) my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to:

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, N.Y. 10172
Telephone No. (212) 758-2400

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 2)

COPY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor MAKOTO OGURA
Inventor's signature Makoto Ogura
Date May 15, 1996 Citizen/Subject of JAPAN
Residence Isehara-shi, Kanagawa-ken, Japan
Post Office Address c/o Canon Kabushiki Kaisha
30-2, 3-chome, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any _____
Second Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Third Joint Inventor, if any _____
Third Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Fourth Joint Inventor, if any _____
Fourth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Fifth Joint Inventor, if any _____
Fifth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Sixth Joint Inventor, if any _____
Sixth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____